

COLORNIA PURO

HETEROGENOUS VINYL FLOORING



 Medsom®

COLORNIA PURO

Colornia series is a value added product in a wide choice of natural colors that are perfectly suited for heavy foot traffic applications, especially recommended for applications in healthcare and education for their resistance and ease of cleaning.

FEATURES

✓ Highly Durable

Composed of a single compact layer of vinyl, it's tough and ultra-durable solutions for heavy traffic areas

✓ Simple Maintenance

The surface treatment is specifically designed for easy cleaning & maintenance with high quality scratch resistant properties

✓ Antibacterial

Resistant to commonly used disinfectants for personal care & health cure environments, prohibiting bacteria growth

✓ Superior Decoration Performance

The non-directional with natural colors create an quite and welcoming interior atmosphere.

✓ Health and Eco-friendly


Low emissions & phthalate free manufacturing contribute to a healthy indoor environment



STRUCTURE

1 PUR special maintenance treatment


2 Compacted homogeneous floor

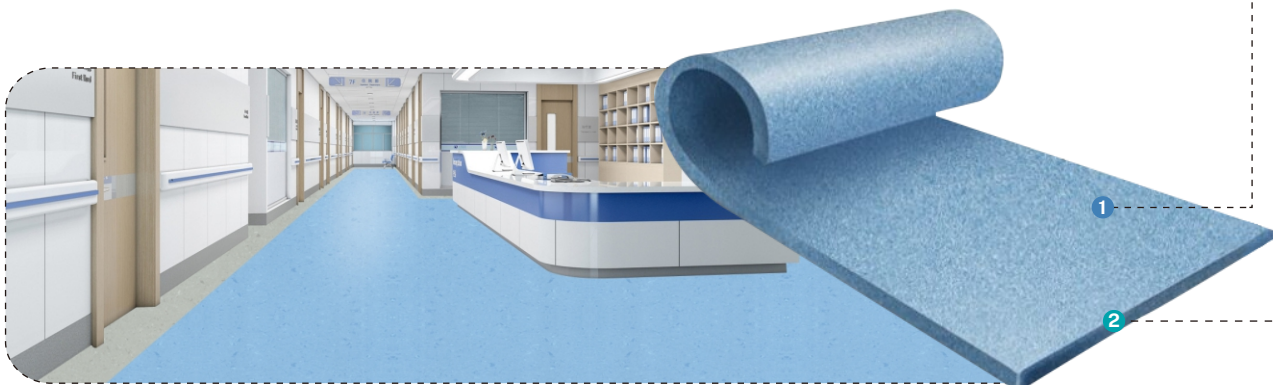


COLORNIA PURO



HOMOGENEOUS VINYL
SIZE: 2.0mm*2m*20m

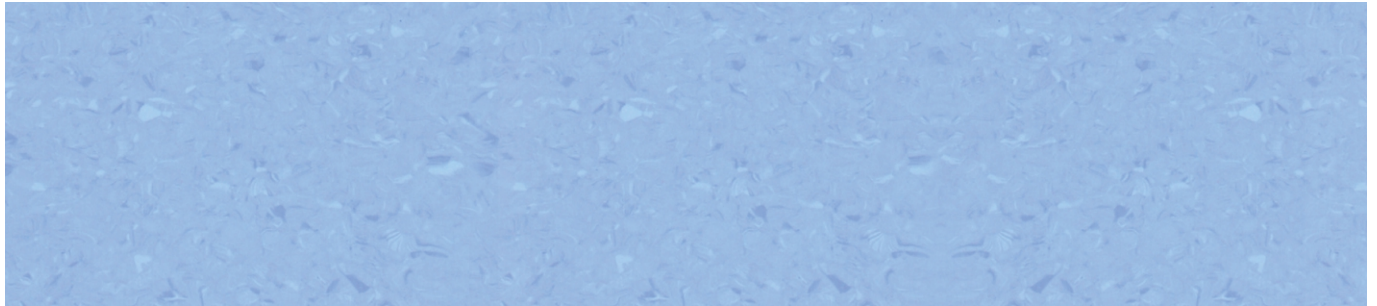

CP-2201

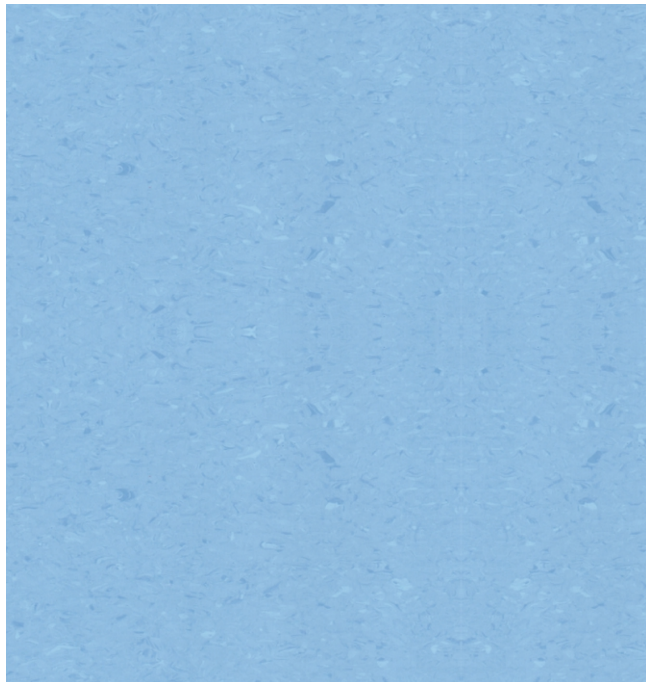

CP-2202




CP-2203



CP-2204



CP-2201

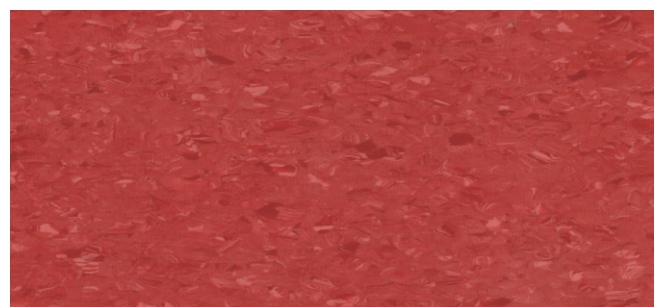

CP-2205

COLORNIA PURO



HOMOGENEOUS VINYL
SIZE:2.0mm*2m*20m



CP-2206




CP-2207




CP-2208



CP-2209

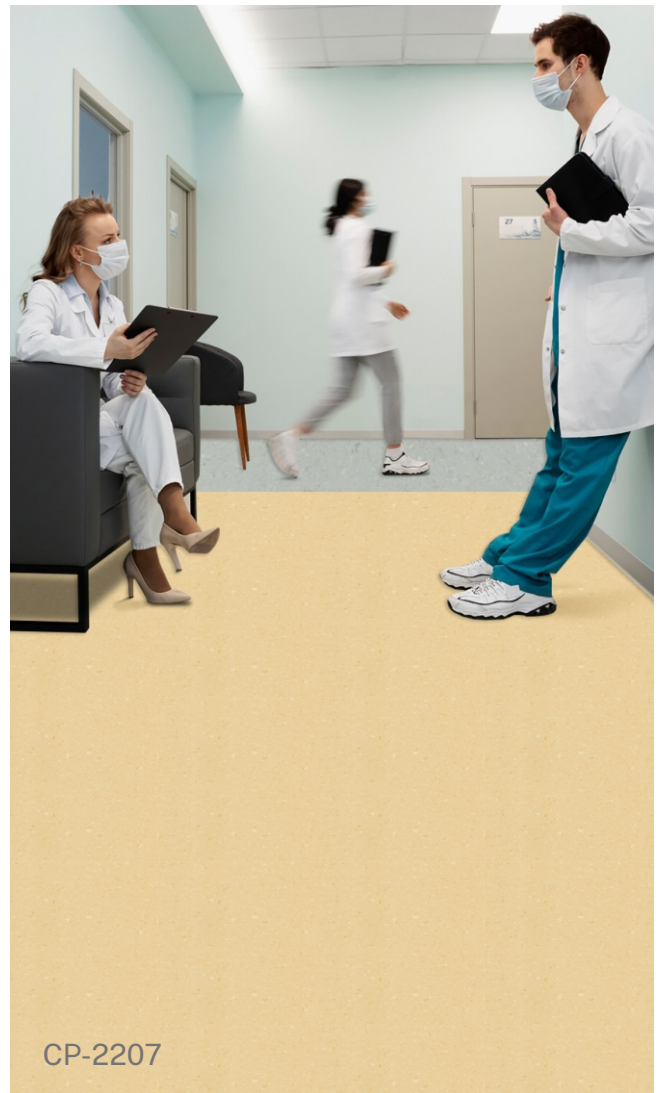

CP-2207

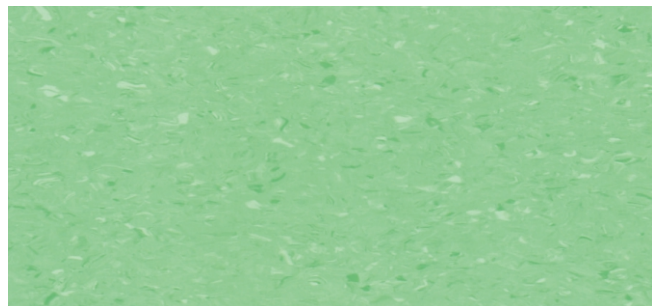

CP-2210

COLORNIA PURO



HOMOGENEOUS VINYL
SIZE:2.0mm*2m*20m




CP-2211




CP-2212




CP-2213

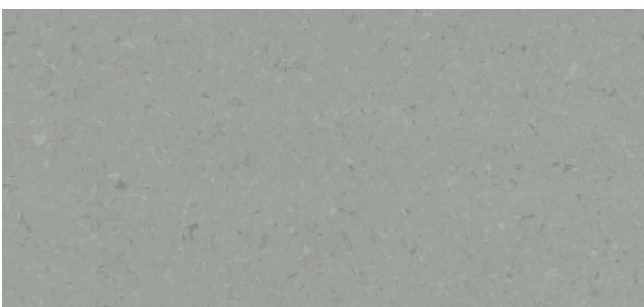



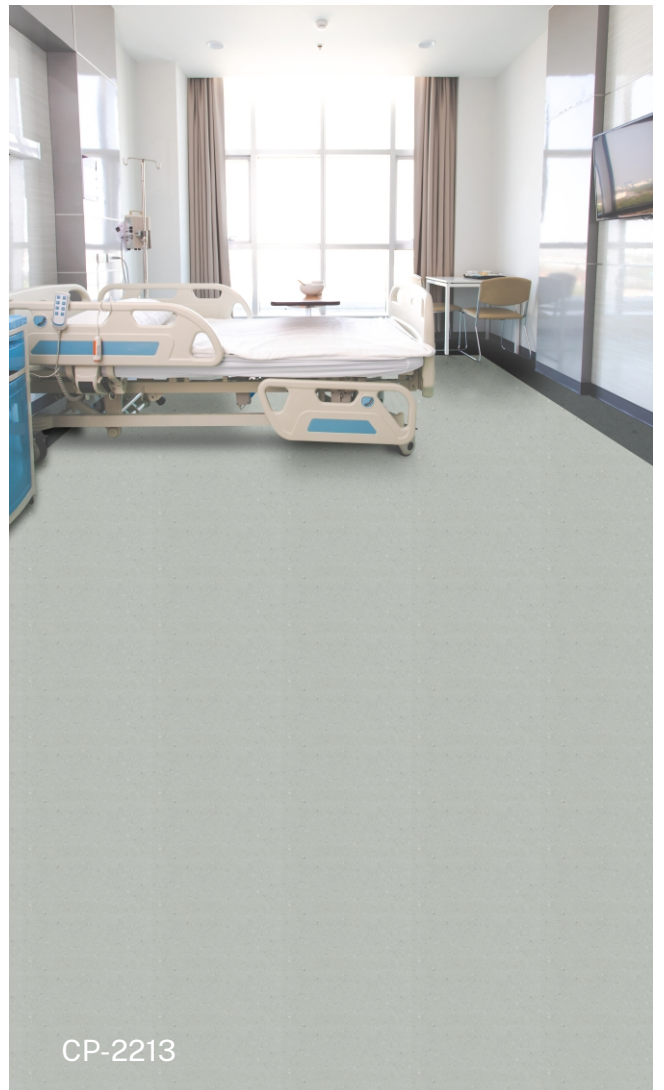



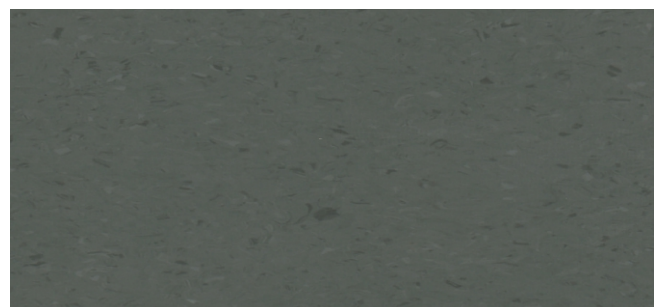













CP-2214






CP-2213



CP-2215

DESCRIPTION	STANDARD	SYMBOL	RESULT
Total thickness	ISO24346-EN 428		2.0mm
Width	ISO24346-EN 426		2mm
Roll width	ISO24346-EN 426		20m
SAFETY CRITERIA			
Fire rating	GB 8624-2012		Class:Bfl-s1
Toxic testing	GB 18586-2001		Good
Slip resistance dry	EN 13893		≥0.3
Slip resistance wet	EN 51130		R9
PERFORMANCES			
Abrasion group	EN 649		T
Castor wheel test	EN 425		No damage
Colour fastness	EN ISO105-B02		≥6
Dchemical stability	EN 434		≤0.40%
Dcurl resultant to heat	EN 434		≤1mm
Sound reduction	EN ISO717/2		Approx.+4dB
Residual indentation	EN 433		Approx.0.04
Chemical products resistance	EN 423		Good
Surface treatment			PUR
Anti-bacterial and fungicidal			Good
VOC			<10
CLASSIFICATION			
Commercial very level	EN 685		Class 34
Industrial level	EN 685		Class 43



Phthalate Free



Recyclable



Health & Safety



Indoor air quality is excellent